OPPLE
LIGHTING.

Suspended Linear Tallinn

Illuminate your workspace

OPPLE.COM

OPPLE
LIGHTING.

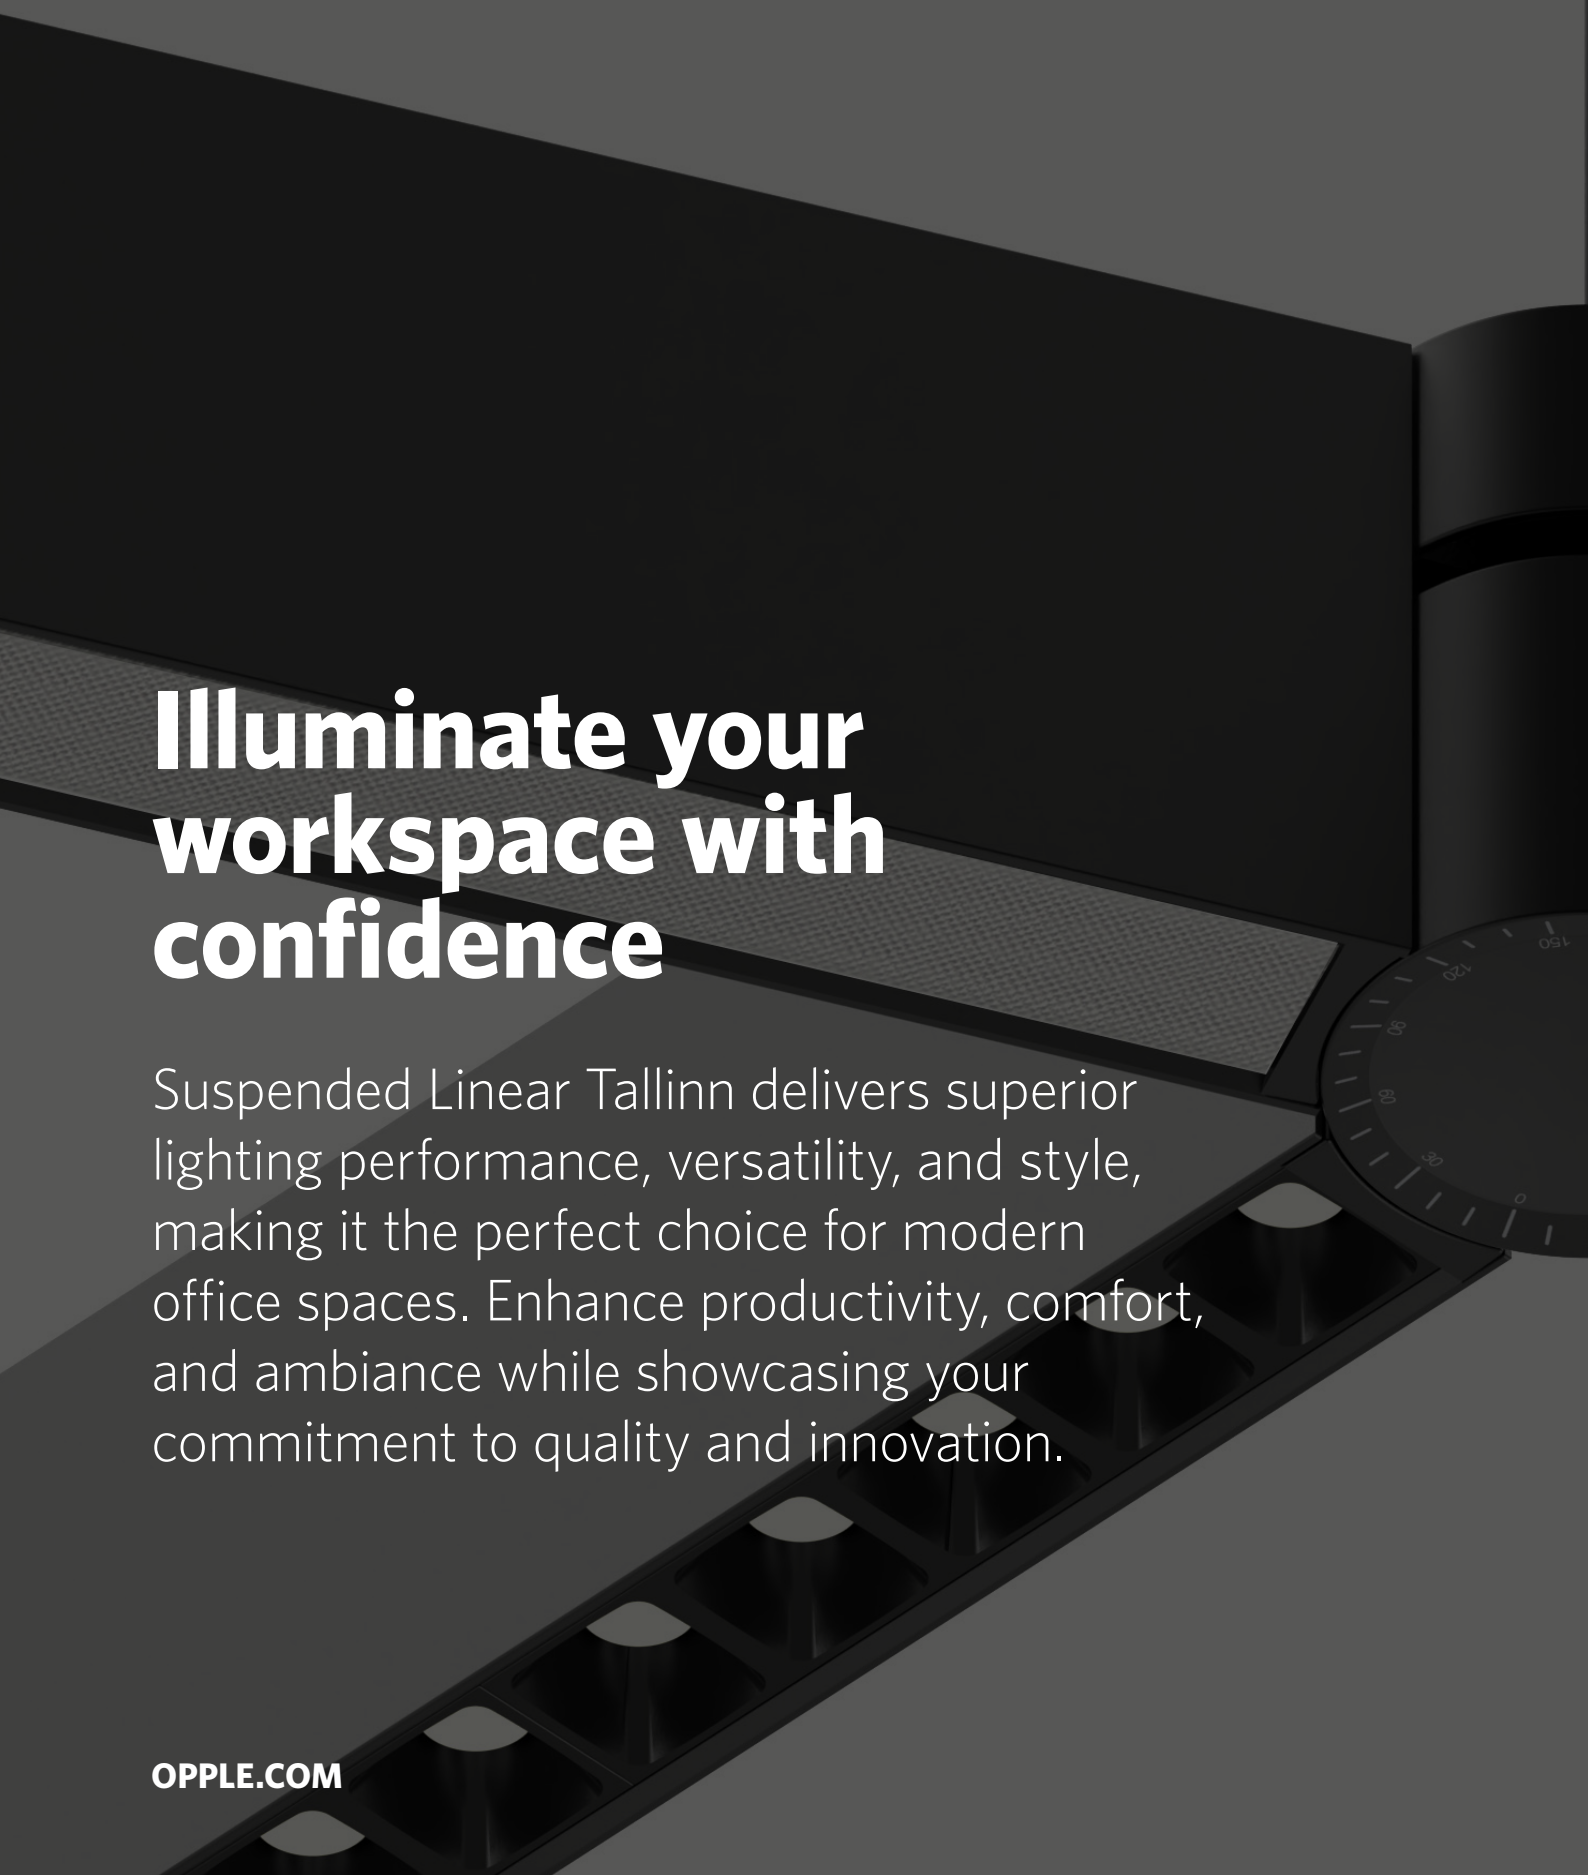

Illuminate your workspace with confidence

Suspended Linear Tallinn delivers superior lighting performance, versatility, and style, making it the perfect choice for modern office spaces. Enhance productivity, comfort, and ambiance while showcasing your commitment to quality and innovation.

OPPLE.COM

Stylish slim design

Upside
150° wide beam angle, smooth indirect light effect

Downside
50° beam angle, low glare light on desktop

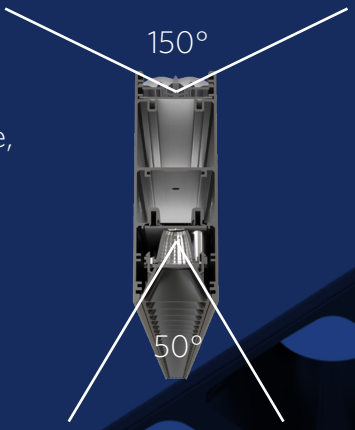

No gap Connection
Connection-Kit



Shiny reflector
Ultra-thin vacuum electroplated primary reflector

Two-fold optics
Extremely low glare (UGR<10)

Matt black reflector
Antistatic secondary reflector



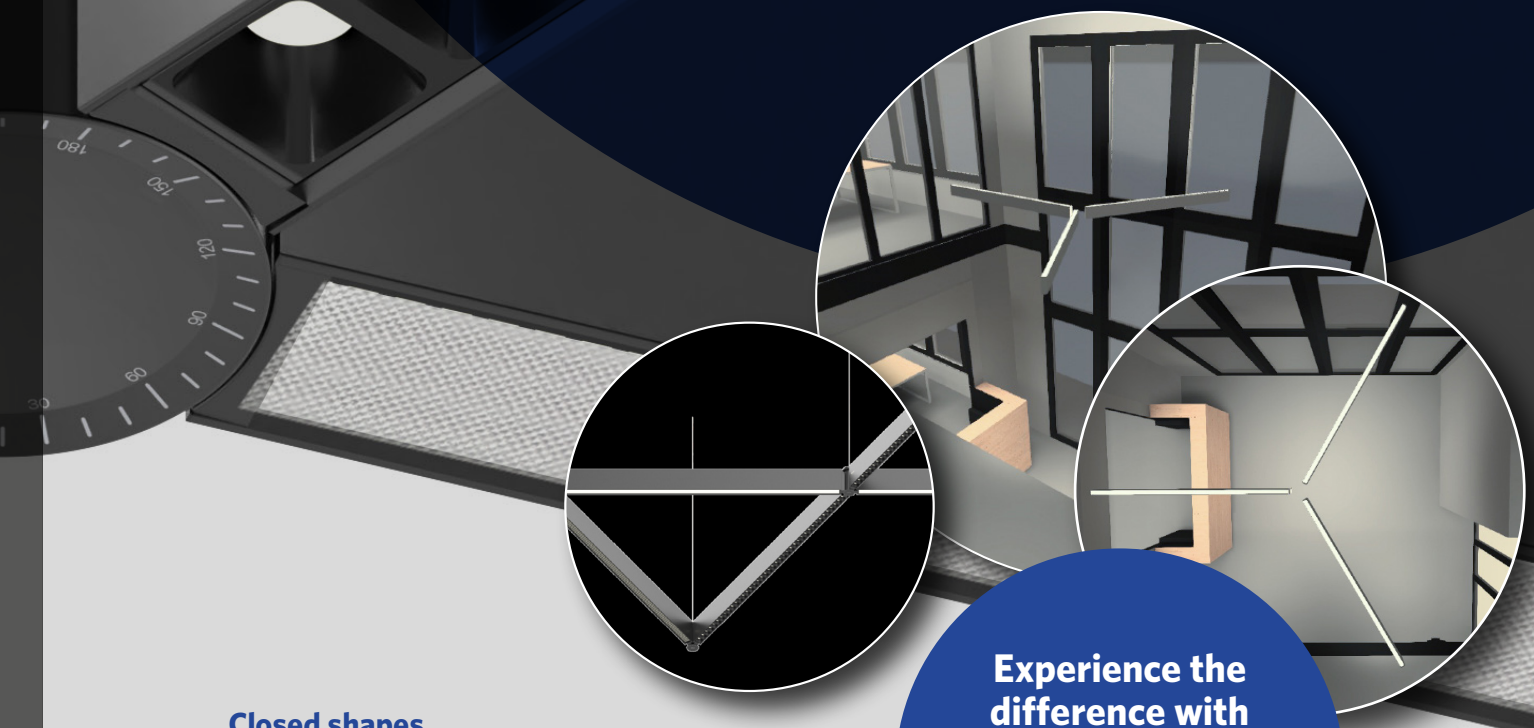

Closed shapes

Open shapes

Experience the difference with Suspended Linear Tallinn – where form meets function in perfect harmony.

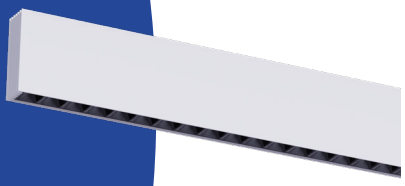

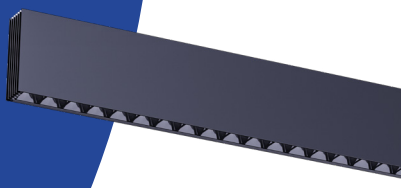

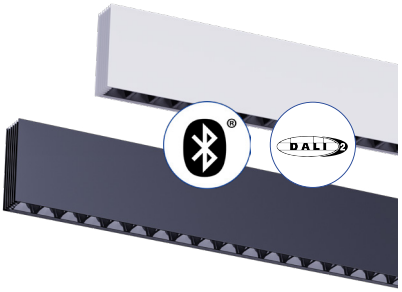

Key Features:

Modern Design

The sleek design of Suspended Linear Tallinn offers a contemporary aesthetic that complements any office interior. Its clean lines and stylish black reflector add a touch of elegance to the space.

Low Glare

With a UGR (Unified Glare Rating) of less than 10, Suspended Linear Tallinn ensures comfortable illumination without causing discomfort or distraction, making it ideal for prolonged use in office environments.

Magnetic Connection

The magnetic connection feature enables flexible mounting of multiple fixtures, allowing you to customize the lighting layout according to your specific needs and preferences effortlessly.

Professional Finishing

Choose between anodized black or matte white finishes to seamlessly integrate Suspended Linear Tallinn into your workspace, ensuring a professional and polished look.

DALI and Smart Compatibility

Enjoy advanced control options with compatibility for both DALI and Smart (BLE2) systems. Easily manage and adjust the lighting settings for optimal comfort and energy efficiency.

Tunable White Technology

Experience ultimate flexibility with Tunable White (TW) technology, offering a wide range of color temperatures from 2700K to 6500K. Adjust the lighting to suit different tasks or create the perfect ambiance for any occasion. This fixture is also perfectly suited for the HCL applications, in combination with the Opple Smart Connect Box.

OPPLE LIGHTING.

PRODUCTS

Item code	Item description	Colour temperature	Finishing	Rated luminous flux	Luminaire efficacy	Equivalent to
529000105900	LEDTallinn-P L15-45W-DALI-TW-D/I-U10-BL	2700|6500 K	RAL 9004	4050 lm	90 lm/W	TL 1x80W
529000106100	LEDTallinn-P L15-45W-BLE2-TW-D/I-U10-BL	2700|6500 K	RAL 9004	4050 lm	90 lm/W	TL 1x80W
529000105800	LEDTallinn-P L15-45W-DALI-TW-D/I-U10-WH	2700|6500 K	RAL 9003	4050 lm	90 lm/W	TL 1x80W
529000106000	LEDTallinn-P L15-45W-BLE2-TW-D/I-U10-WH	2700|6500 K	RAL 9003	4050 lm	90 lm/W	TL 1x80W

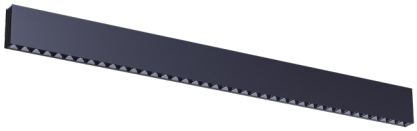

ACCESSORIES

Item code	Item description	Type of accessory/spare part
529098030800	LEDTallinn-P-Connection-Kit	Coupler/connector linear
529098031000	LEDTallinn-P-Magnet-Hub	Coupler/connector flexible
529098031100	LEDTallinn-P-Magnet-End-Cap	End cap, to be used in combination with Magnet Hub





OPPLE LIGHTING BV
Meerenakkerweg 1-07
5652 AR Eindhoven
The Netherlands
+31 (0)88 056 78 88
service@opple.com

CONTACT

For any queries or additional information, please contact one of our account managers. All specifications are available in the Download Centre at **opple.com**

All rights reserved.
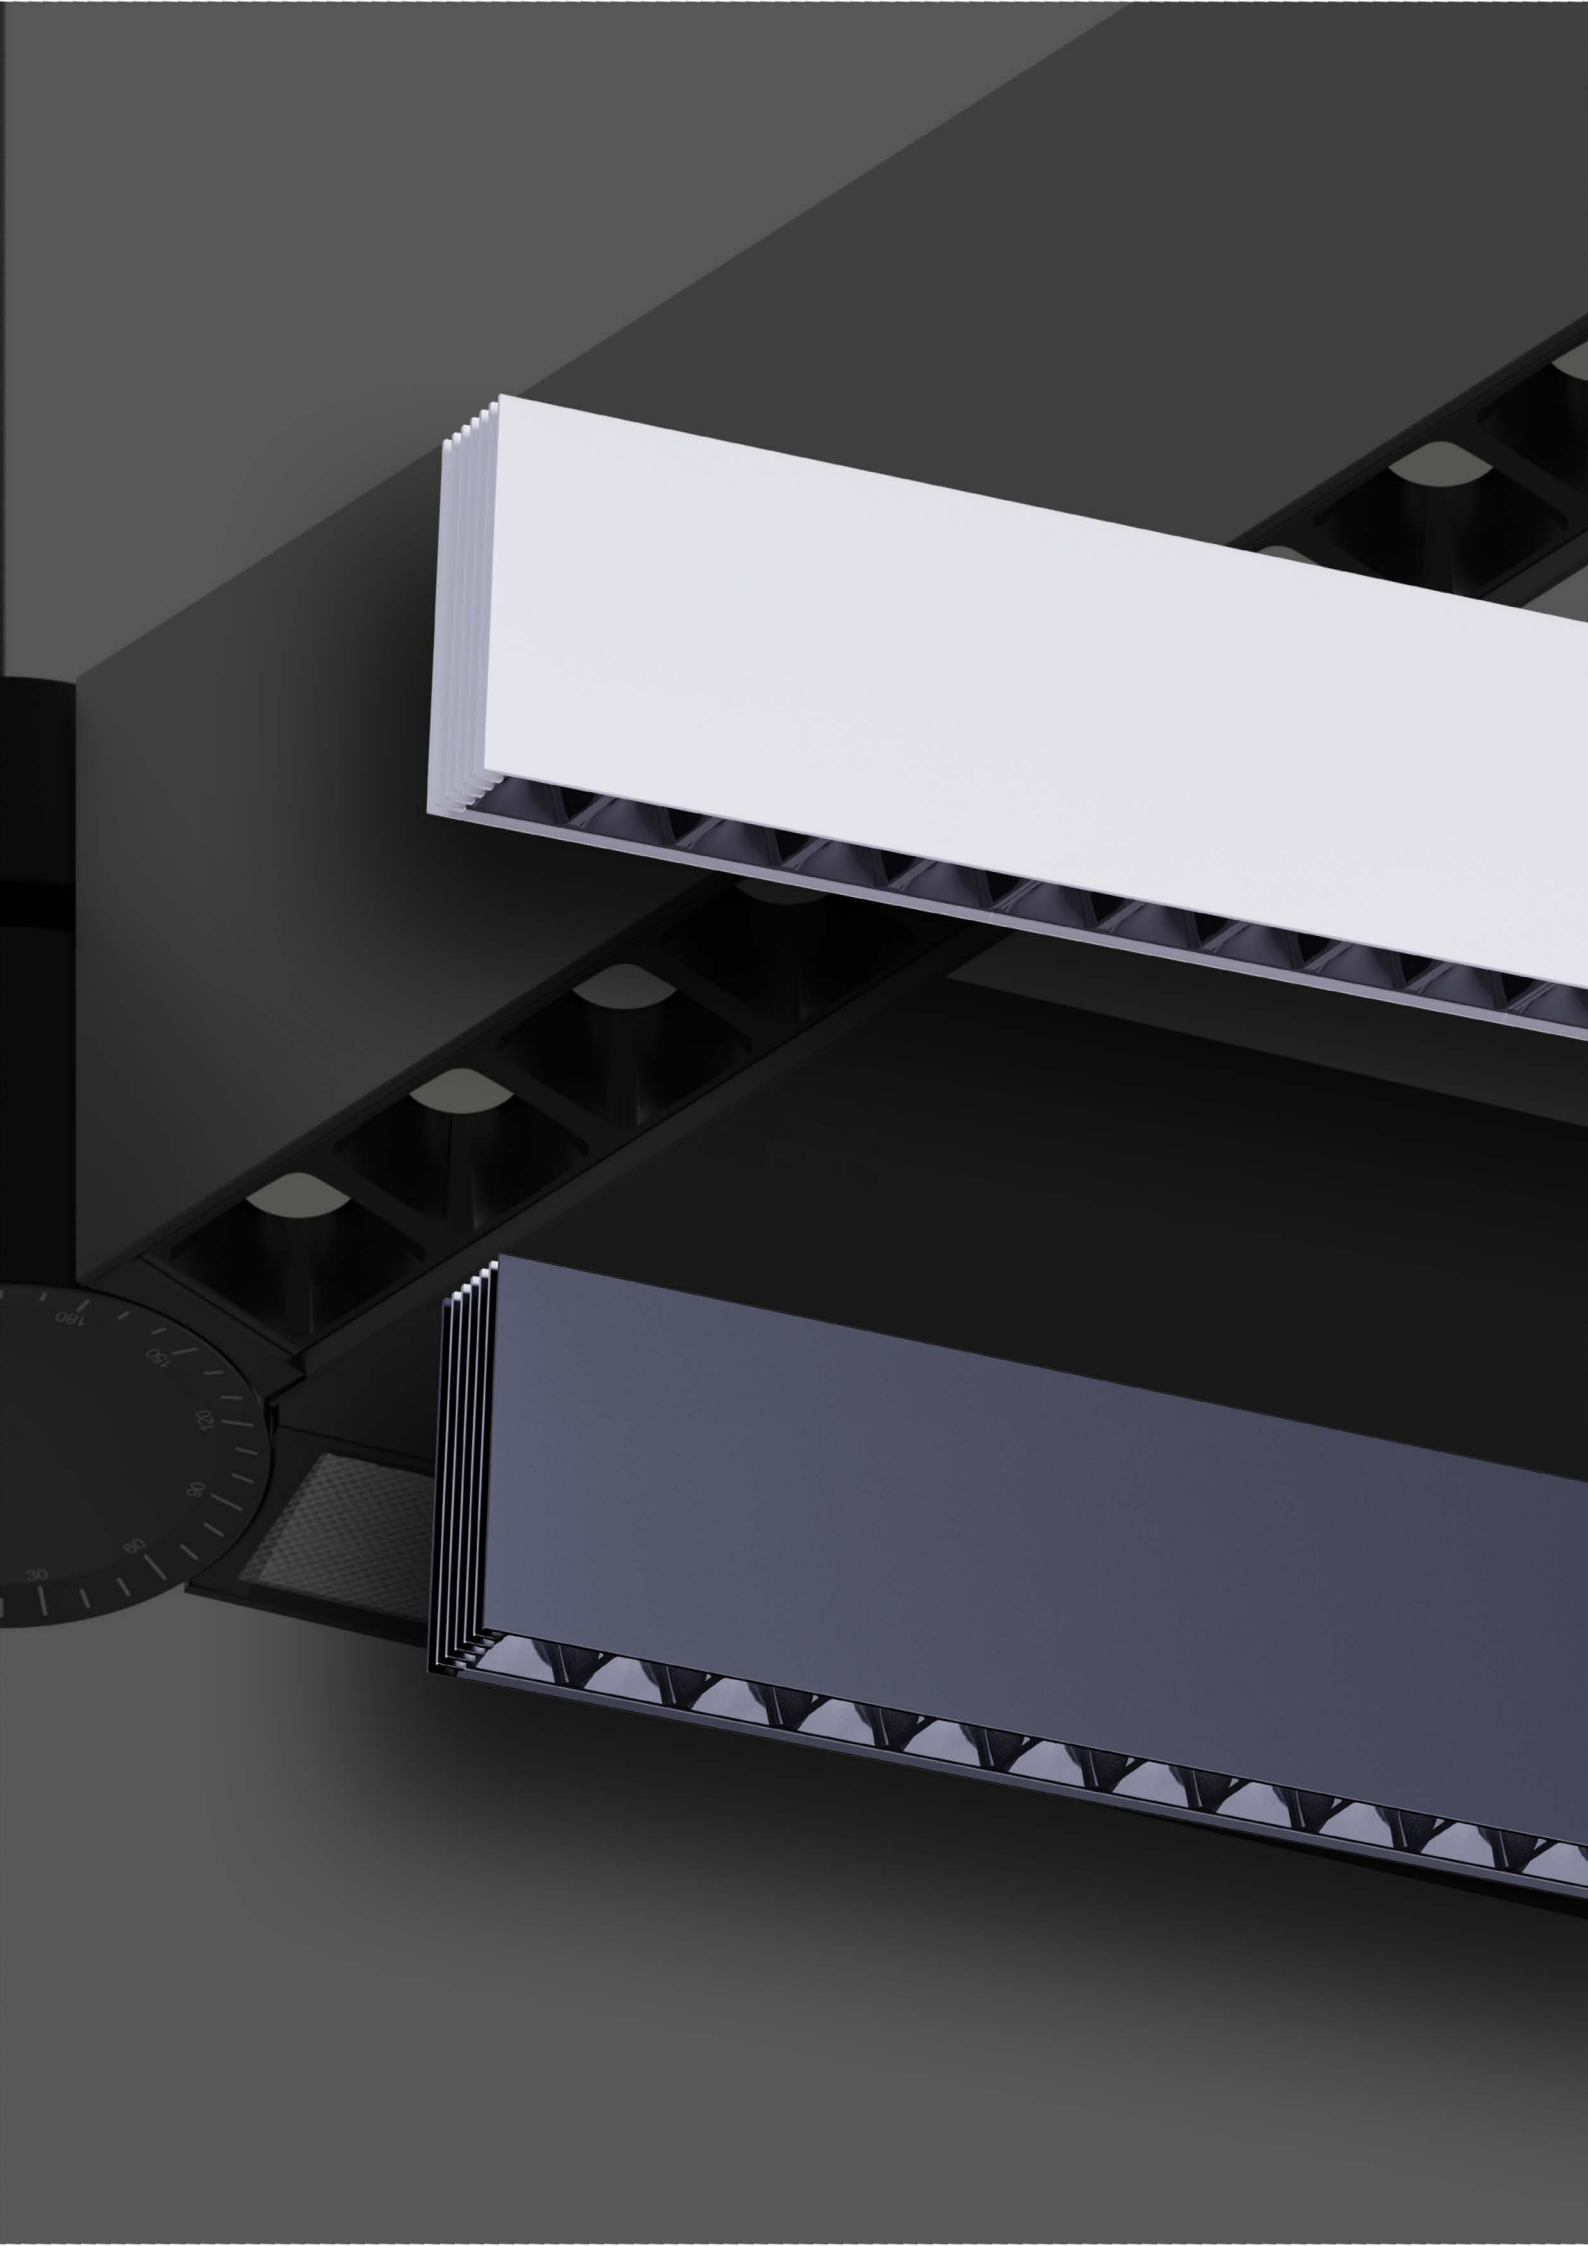
OPPLE.COM