OPPLE
LIGHTING.

OPPLE LIGHTING BV
Meerenakkerweg 1-07
5652 AR Eindhoven
The Netherlands
+31 (0)88 056 78 88
service@opple.com

OPPLE.COM

CONTACT
For any queries or additional information, please contact one of our account managers. All specifications are available in the Download Centre at **opple.com**

All rights reserved.

OPPLE
LIGHTING.

Waterproof
portfolio

OPPLE
LIGHTING.

Discover our complete Waterproof Portfolio

From basic watertight to top-tier performance, our Waterproof portfolio offers a solution for every application. Whether you need reliable water resistance or advanced features, we've got you covered.

Waterproof Special



Waterproof Performer

Waterproof Classic

Waterproof EcoMax

Waterproof Basic



Waterproof Classic Housing

Waterproof Batten

OPPLE.COM

OPPLE
LIGHTING.

Waterproof Special

Tough, Versatile Luminaire for Demanding Environments

3x 2.5mm² through wiring

2 stainless steel mounting clips (free to position)

Easy poke-in connectors

OPPLE Waterproof Special

- Tubular waterproof luminaire with extra high IP rating
- Suitable for outdoor application thanks to IP67/IP69K rating
- Ammonium-resistant, suitable for livestock applications
- Comfortable homogeneous light distribution
- DALI2 dimmable versions available
- Easy installation due to free to position stainless steel mounting brackets
- High efficacy of up to 135 lm/W
- Equipped with 3x2.5mm² throughwiring
- Equipped with breather to prevent condensation

CRI80 · FLICKER-FREE · HACCP CONFORM · DALI 2 · IK06 · IP67 · IP69K · DLG APPROVED 2021 OPPLE LIGHTING LED WATERPROOF SPECIAL ✓ Resistance to ammonia ✓ flicker free DLG Test Report 7195 · EN 25

OPPLE.COM

OPPLE
LIGHTING.

Waterproof Performer

The most efficient waterproof ever created

Improved efficacy of 170lm/W

Standard 2.5mm² wire-through

NEW easy-to-mount end-cap

Comfortable & uniform light

HCL

Power and CCT-switch

Easy wire connection

OPPLE Waterproof Performer G5

- Powerful range of waterproof luminaires in specific “sealed for life” design
- Extreme high efficacy of 170 lm/W
- New easy-to-mount end-cap
- Power/Wattage switch, CCT-switch, and Tunable White versions
- Available as Smart Lighting solution (BLE2) and DALI2
- Supplied with vandal-proof stainless steel ceiling clips
- Equipped with through-wiring, PLUS version with 2 additional wires
- EM versions available

DALI 2 · FLICKER-FREE · TESTED HACCP CONFORM · IK08 · IP66 · ENEC 25 · 4000K - 5700K MULTI CCT · MULTI POWER

OPPLE.COM

OPPLE
LIGHTING.

Waterproof Classic

Timeless Reliability

Improved efficacy of 150lm/W

Optimized diffusor for more uniform illumination

Power-switch inside

Flexible wiring from the back (or side)

Easy connector between LED-module and LED driver

SERVICEABILITY easy replacement of LED-module and/or LED driver

OPPLE Waterproof Classic G2

- NEW: DALI and BLE dimmable versions available
- Sleek classic waterproof solution with clip design
- Improved efficacy of 150 lm/W
- Optimized diffusor design for more uniform illumination patterns
- Power switch and sensor (MD) versions available
- Wiring from the back or side possible
- Supplied with vandal-proof stainless steel ceiling and suspension clips
- EM versions available
- Wire through kits available as accessory

IK08 IP66 MULTI POWER

OPPLE
LIGHTING.

Waterproof EcoMax

Environmentally Friendly

Comfortable & uniform light

Standard 3x2.5mm² wire-through

Efficacy of up to 150lm/W

NEW twist-and-lock end-cap

Power-switch!

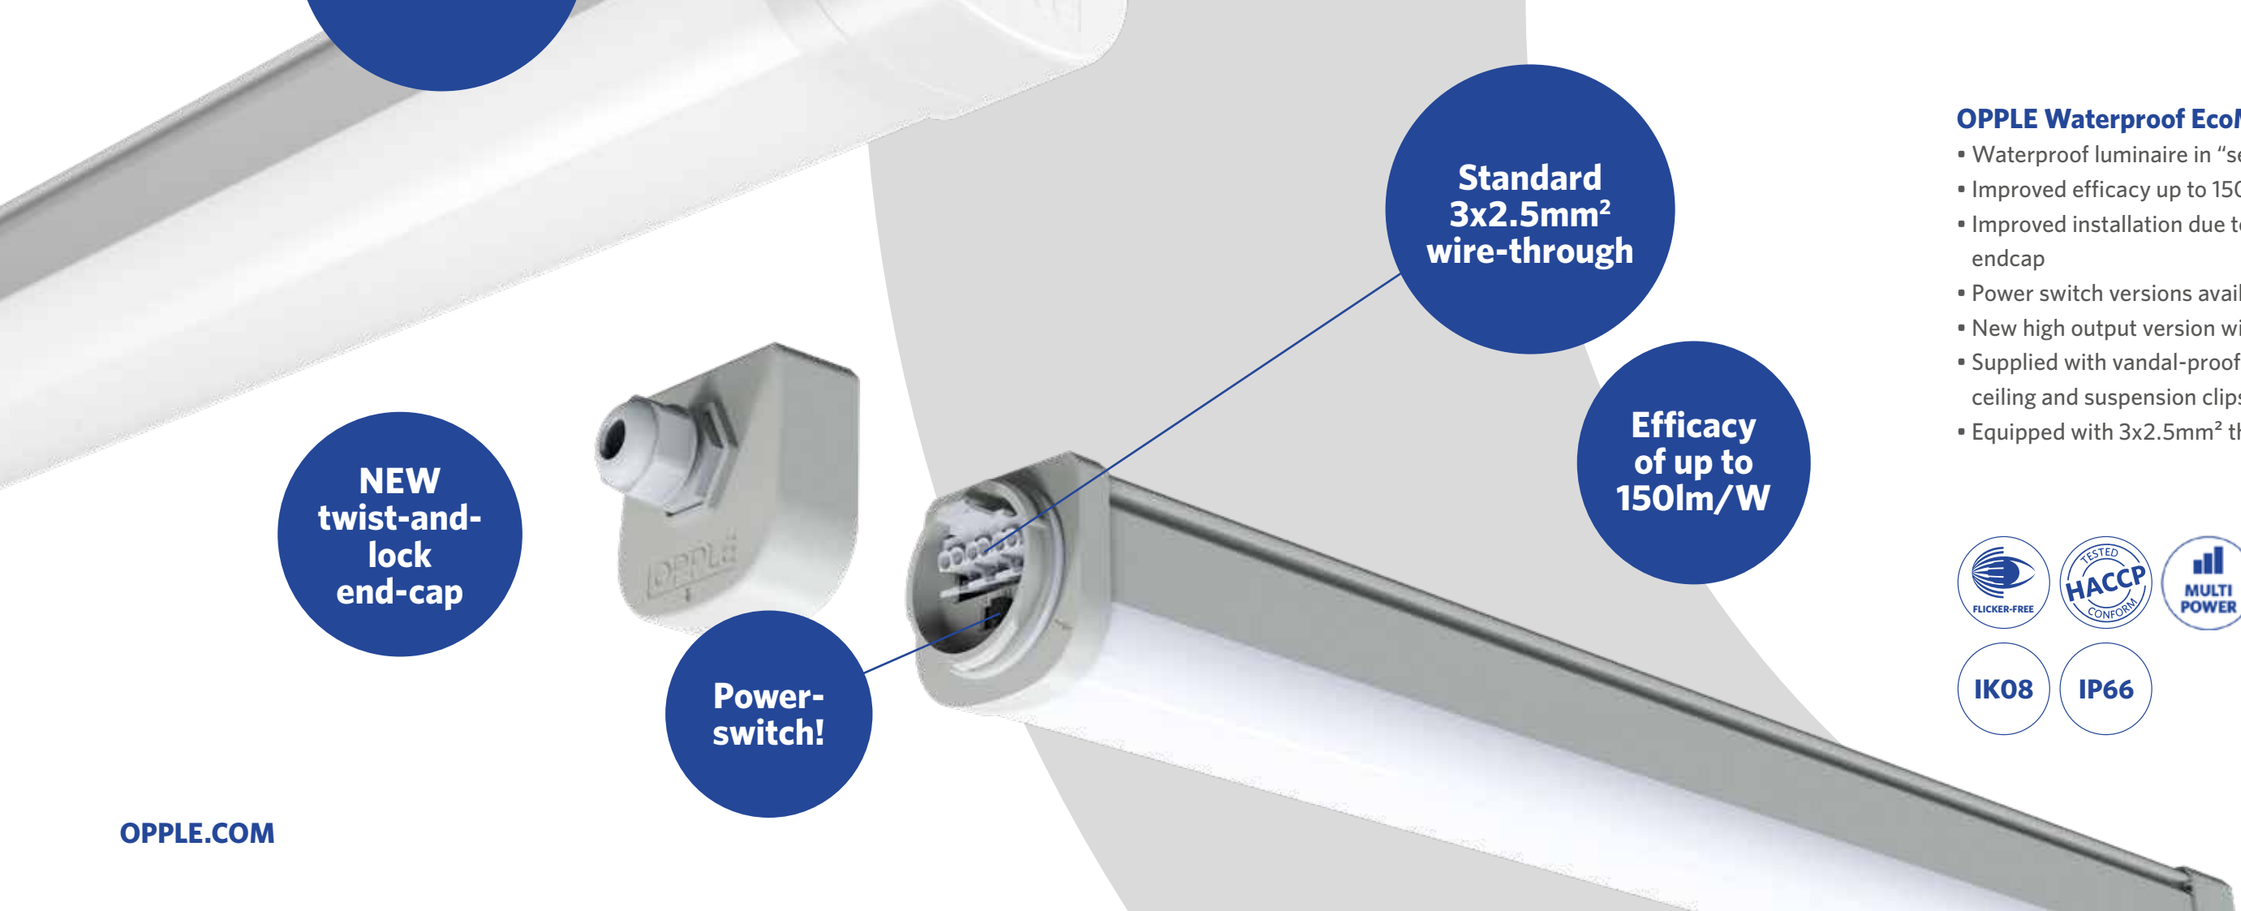

OPPLE Waterproof EcoMax G3

- Waterproof luminaire in “sealed-for-life” concept
- Improved efficacy up to 150 lm/W
- Improved installation due to new twist-and-lock endcap
- Power switch versions available
- New high output version with 8,250lm output
- Supplied with vandal-proof stainless steel ceiling and suspension clips
- Equipped with 3x2.5mm² throughwiring

FLICKER-FREE · TESTED HACCP CONFORM · MULTI POWER

IK08 · IP66

OPPLE
LIGHTING.

Waterproof Basic

Great value for money!

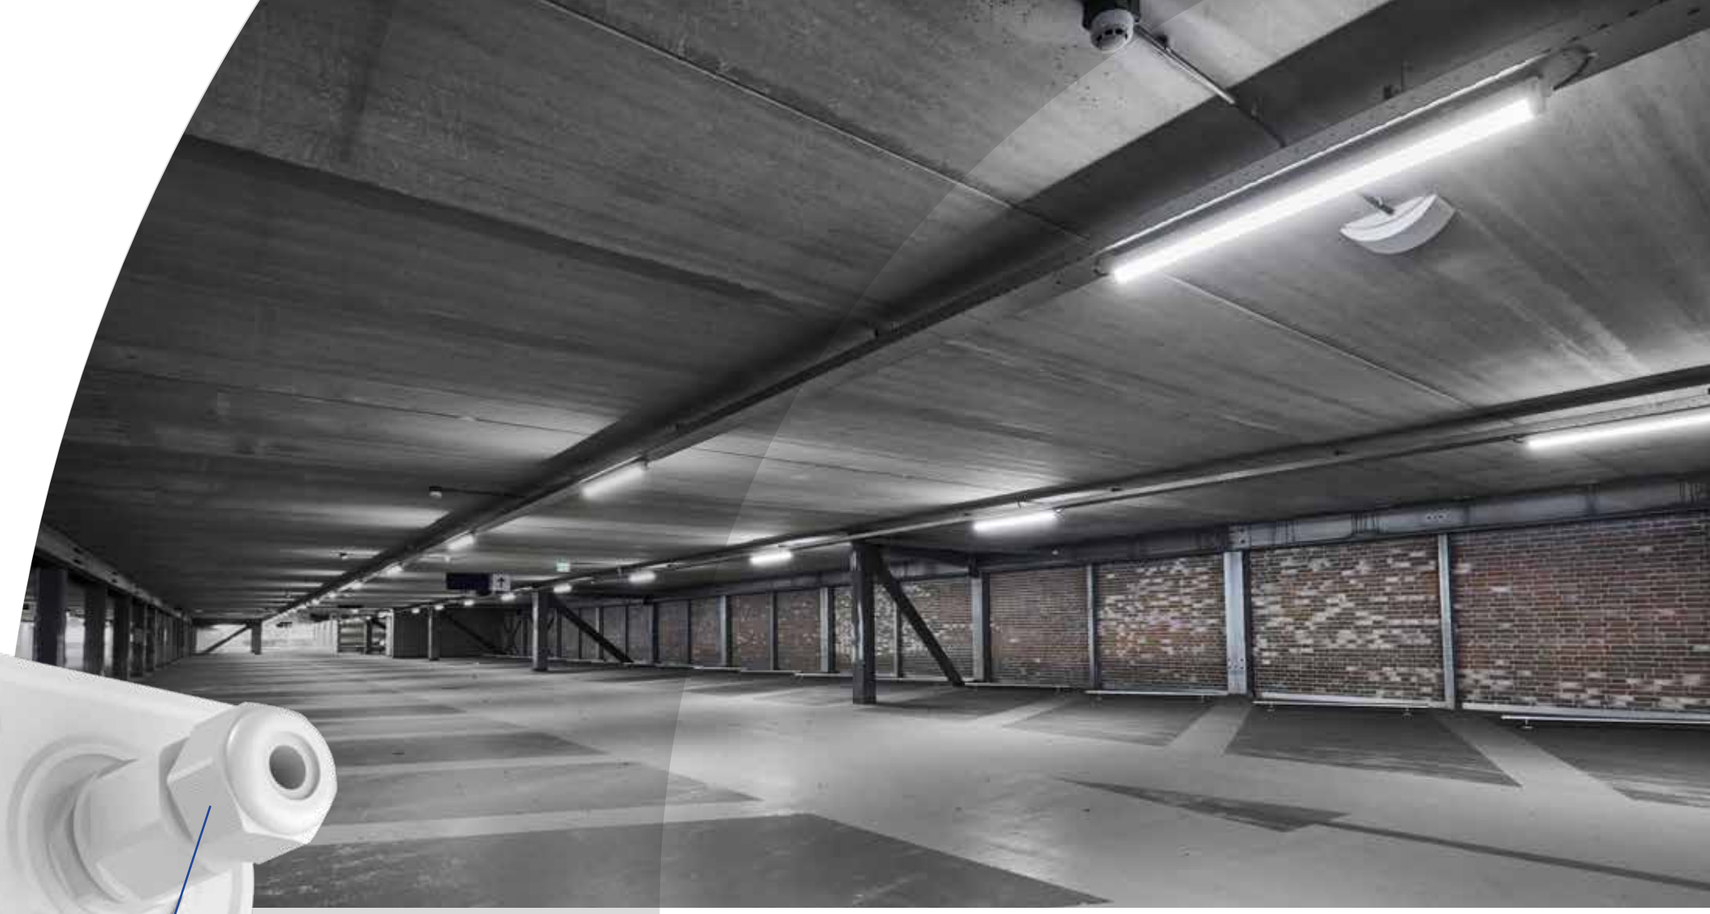

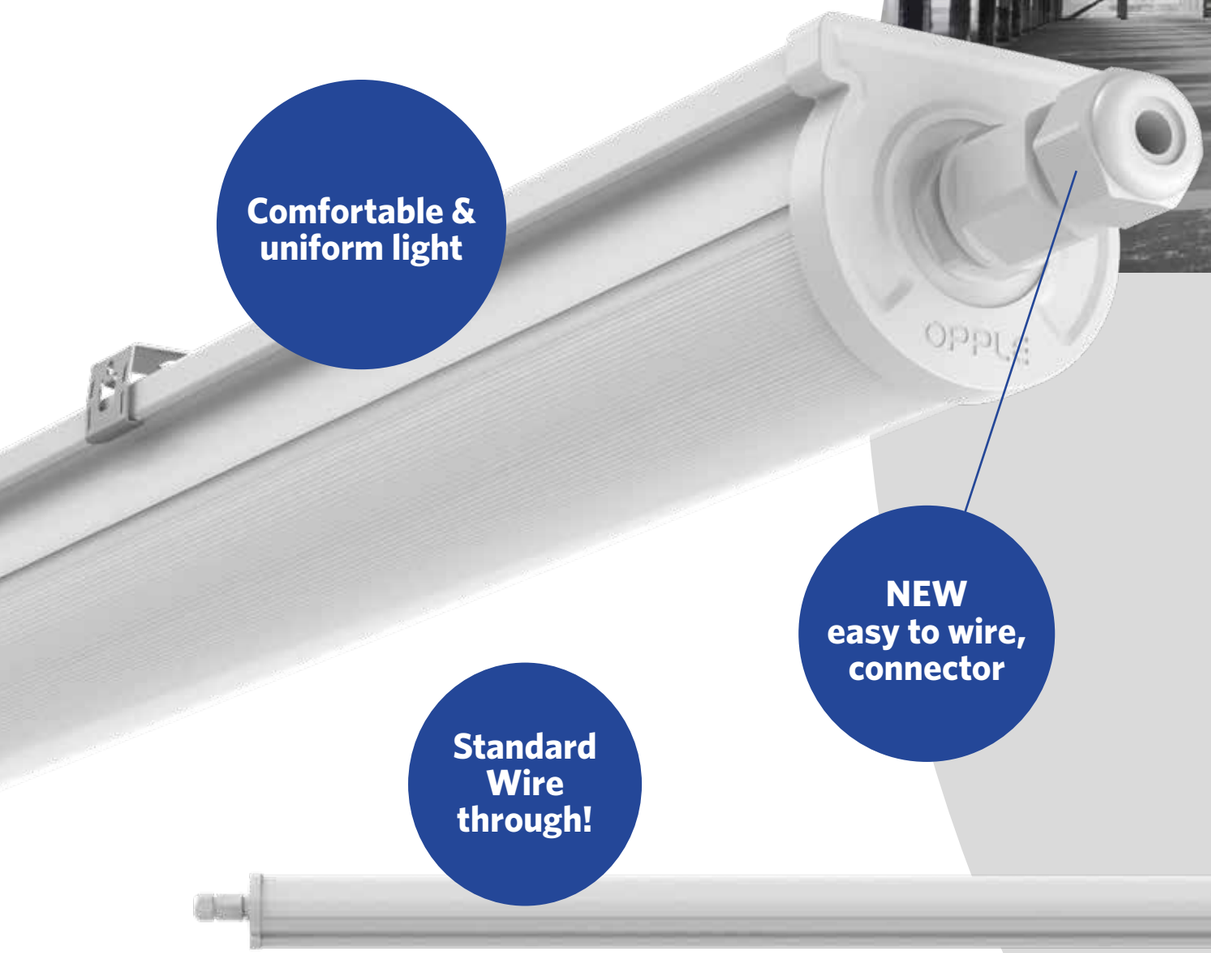

Comfortable & uniform light

NEW easy to wire, connector

Improved lifetime (L70) of 50,000hrs

Standard Wire through!

Improved efficacy of 130lm/W

OPPLE Waterproof Basic G2

- Cost effective ''sealed-for-life'' waterproof luminaire
- Improved efficacy of 130 lm/W
- Standard equipped with wirethrough for faster installation
- Available in two CCTs (4000K/6500K)
- Easy, tool-less installation for electrical onnection
- Supplied with stainless steel ceiling and suspension clips

FLICKER-FREE **IK08** **IP65**

OPPLE
LIGHTING.

Waterproof Classic Housing

Perfect companion for T8 Tubes

Retro look & feel with uniform light

2 lamp version

Cost effective waterproof option

1 lamp version

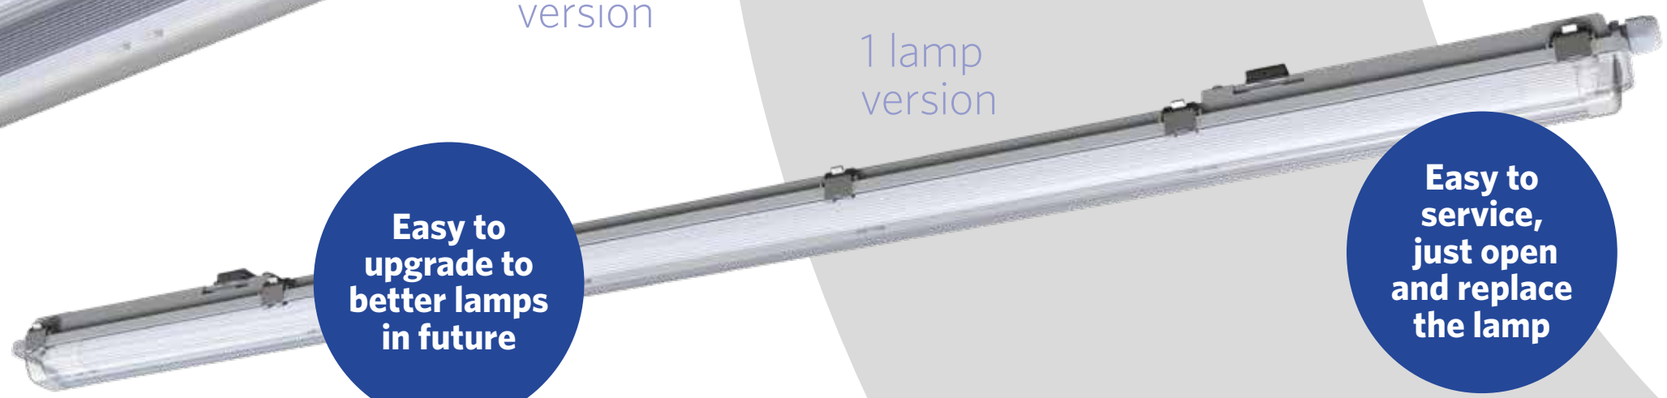

Easy to upgrade to better lamps in future

Easy to service, just open and replace the lamp

OPPLE Classic Housing

- Waterproof housing for use with LED TL tubes (tubes excluded), perfect in combination with the OPPLE LED T8 Tubes
- Flexible wiring options on side and backside
- Future-proof solution due to serviceability and upgradability of lamps
- Equipped with 3x1.5mm² throughwiring

IK08 **IP65**

OPPLE.COM

OPPLE
LIGHTING.

Waterproof Batten

The Installer's Choice

Perfectly uniform light surface

1m cable

Slim & compact design

IP65 connector included

Stainless steel mounting clips, free to position

OPPLE Waterproof Batten

- Cost effective IP65 Waterproof solution
- Slim and compact design
- 1m cable with IP65-connector
- Perfect light uniformity
- Supplied with stainless steel mounting clips, movable along the entire length of the fixture

1M · CRI80 · FLICKER-FREE · IK06 · IP65

OPPLE.COM

OPPLE
LIGHTING.

Waterproof offering

Great when on a budget

Waterproof Batten

- 110 lm/W
- On/Off
- IP65 IK06
- Fixed cable (1-side)
- L70 @30,000 hrs

Waterproof Housing

- Specs depend on lamp specs
- IP65 IK08

Waterproof Basic

- 130 lm/W
- On/Off
- IP65 IK08
- 3x 1.5mm²
- L70 @50,000 hrs

Super over-the-counter solution

Waterproof EcoMax

- 140-150 lm/W
- On/Off
- Power Switch
- IP66 IK08
- 3x 2.5mm²
- L70 @70,000 hrs
- HACCP

Fantastic project solution

Waterproof Classic

- 150 lm/W
- On/Off + DALI2 + BLE2 + MD
- Power Switch
- IP66 IK08
- 3x 2.5mm² (as acc.)
- L70 @70,000 hrs
- EM-possible

Waterproof Performer

- 170 lm/W
- On/Off + DALI2 + BLE2
- Power Switch
- IP66 IK08
- 3/5x 2.5mm²
- PLUS versions
- L70 @100,000 hrs
- HACCP
- EM-possible
- Tunable White versions

Waterproof Special

- 135 lm/W
- On/Off
- IP67/69K IK06
- 3x 2.5mm²
- L70 @70,000 hrs
- HACCP